

CE Test Report

Equipment : Radio Module
Model No. : SSD45N
Brand Name : Laird Technologies
Applicant : Laird Technologies
Address : 11160 Thompson Ave. / Lenexa, Kansas /
66219 / USA
Standard : EN 301 893 V1.8.1 (2015-03)
Received Date : Jan. 20, 2016
Tested Date : Jan. 20 ~ Jan. 25, 2016

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Approved & Reviewed by:



Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information.....	5
1.2	Local Support Equipment List	8
1.3	Test Setup Chart	8
1.4	Test Equipment and Calibration Data	9
1.5	Testing Applied Standards	10
1.6	Measurement Uncertainty	10
2	TEST CONFIGURATION	11
2.1	Testing Condition	11
2.2	The Worst Test Modes and Channel Details	11
3	TRANSMITTER TEST RESULTS.....	12
3.1	Carrier Frequencies.....	12
3.2	Occupied Channel Bandwidth	19
3.3	RF Output Power, Transmit Power Control (TPC) and Power density	20
3.4	Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands.....	35
3.5	Transmitter Unwanted Emissions within the 5 GHz RLAN Band	61
4	RECEIVER TEST RESULTS	64
4.1	Receiver Spurious Emissions.....	64
5	ADAPTIVITY TEST RESULTS	90
5.1	Adaptivity	90
6	PHOTOGRAPHS OF THE TEST CONFIGURATION	94
7	TEST LABORATORY INFORMATION	97

Release Record

Report No.	Version	Description	Issued Date
ER442904-03AN	Rev. 01	Initial issue	Feb. 15, 2016

Summary of Test Result

Ref. Std. Clause	Test Items	Measured	Result
4.2	Centre Frequencies	Meet the requirement of limit.	Pass
4.3	Nominal Channel Bandwidth and Occupied Channel Bandwidth	Meet the requirement of limit.	Pass
4.4	RF Output Power & Transmit Power Control (TPC)	5.15-5.35GHz: 22.15 dBm 5.47-5.725GHz: 22.05 dBm	Pass
4.4	Power Density	Meet the requirement of limit.	Pass
4.5	Transmitter Unwanted Emissions	Meet the requirement of limit.	Pass
4.6	Receiver Spurious Emissions	Meet the requirement of limit.	Pass
4.7	Dynamic Frequency Selection (DFS)	Meet the requirement of limit.	Pass
4.8	Adaptivity (Channel Access Mechanism)	Meet the requirement of limit.	Pass
4.10	Geo-location capability	This test is not required since the device does not support this function	NA

NOTE: The DFS measurement was recorded in Report No.: EY442904-03

1 General Description

1.1 Information

This report is issued as a supplementary report to the original ICC report no. ER442904AN. The modification is updating standard from V1.7.1 to V1.8.1. All tests had been done and presented in the following sections.

1.1.1 Specification of the Equipment under Test (EUT)

RF General Information					
IEEE Std. 802.11	Frequency Range (MHz)	Ch. Freq. (MHz)	Channel Number	Transmit Chains (N _{TX})	Data Rate / MCS
a	5150-5250 5250-5350 5500-5700	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [11]	1	6-54 Mbps
n (HT20)	5150-5250 5250-5350 5500-5700	5180-5240 5260-5320 5500-5700	36-48 [4] 52-64 [4] 100-140 [11]	1	MCS 0-7

Note 1: 802.11a/n uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM modulation.

1.1.2 Antenna Details

Ant. No.	Brand / Model	Type	Connector	Operating Frequencies (MHz) / Antenna Gain (dBi)			
				2400~2483.5	5150~5250	5250~5350	5470~5725
1	MAG.LAYERS EDA-1513-25GR2 -B2-CY	Dipole	SMA Jack Reverse	2	2	2	2
2	MAG.LAYERS PCA-4606-2G4C1 -A13-CY	PCB Dipole	UFL	2.21	2.21	2.21	2.21
3	Laird NanoBlade-IP04	PCB Dipole	UFL	2	3.9	3.9	4
4	Laird MAF95310 Mini NanoBlade Flex	PCB Dipole	UFL	2.79	3.38	3.38	3.38
5	Laird NanoBlue-IP04	PCB Dipole	UFL	2	---	---	---
6	Ethertronics WLAN_1000146	PIFA	UFL	2.5	3.5	3.5	3.5

1.1.3 EUT Operational Condition

Power Supply Type	3.3Vdc from host		
Operational Voltage	☒ Vnom (3.30 V)	☒ Vmax (3.40 V)	☒ Vmin (3.20 V)
Operational Climatic	☒ Tnom (20°C)	☒ Tmax (70°C)	☒ Tmin (-20°C)

1.1.4 Accessories

N/A

1.1.5 Adaptive Equipment

Adaptive Equipment	
☒	Adaptive Equipment without the possibility to switch to a non-adaptive mode:
☐	The equipment has implemented an LBT based DAA mechanism:
☐	The equipment is Frame Based equipment
☒	The equipment is Load Based equipment
☐	The equipment can switch dynamically between Frame Based and Load Based equipment
☐	The equipment has implemented an non-LBT based DAA mechanism
☐	The equipment can operate in more than one adaptive mode
☐	Adaptive Equipment which can also operate in a non-adaptive mode

1.1.6 Channel List

Frequency band (MHz)	
802.11 a / n HT20	
Channel	Frequency(MHz)
36	5180
40	5200
44	5220
48	5240
52	5260
56	5280
60	5300
64	5320
100	5500
104	5520
108	5540
112	5560
116	5580
120	5600
124	5620
128	5640
132	5660
136	5680
140	5700

1.1.7 Test Tool and Duty Cycle

Test tool	ART, version: rev0.2 build#26
Duty Cycle Of Test Signal (%)	99.30% - IEEE 802.11a 99.25% - IEEE 802.11n (HT20)
Duty Factor	0.03 - IEEE 802.11a 0.03 - IEEE 802.11n (HT20)


1.1.8 Power Setting

Modulation Mode	Test Frequency (MHz)			
	a / HT20			
	5180	5320	5500	5700
a	19.5	20.5	21.5	20.5
n (HT20)	19.5	20.5	22	20.5

1.2 Local Support Equipment List

Support Equipment List						
No.	Equipment	Brand	Model	S/N	FCC ID	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6440	2ZC4Z52	DoC	---

1.3 Test Setup Chart

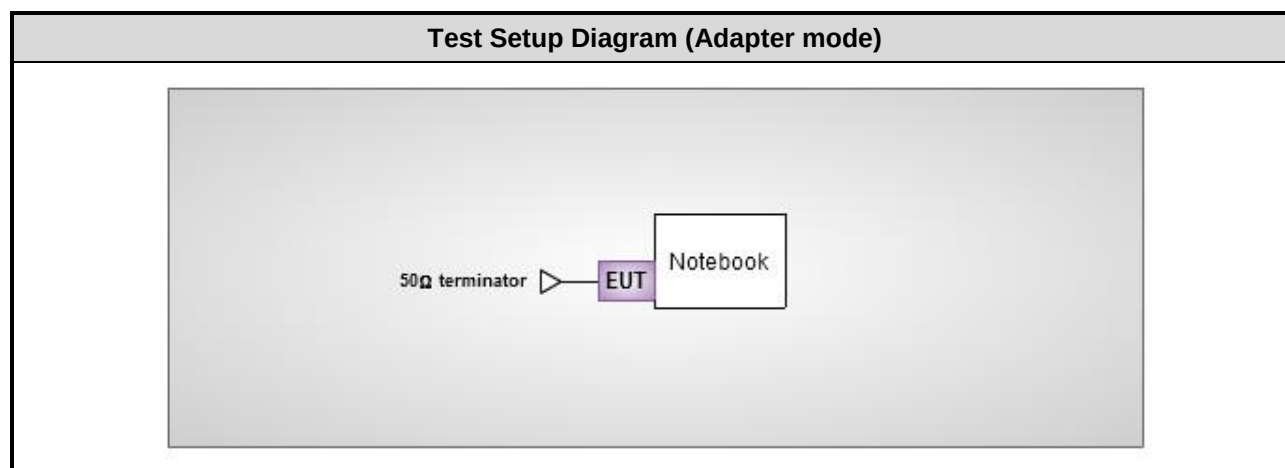

1.4 Test Equipment and Calibration Data

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Oct. 14, 2015	Oct. 13, 2016
TEMP&HUMIDITY CHAMBER	GIANT FORCE	GCT-225-40-SP-SD	MAF1212-002	Nov. 27, 2015	Nov. 26, 2016
Power Meter	Anritsu	ML2495A	1241002	Sep. 21, 2015	Sep. 20, 2016
Power Sensor	Anritsu	MA2411B	1207366	Sep. 21, 2015	Sep. 20, 2016
DC POWER SOURCE	GW INSTRUK	GPC-3060D	EM884797	Oct. 20, 2015	Oct. 19, 2016
Measurement Software	Sporton	Sporton_1	1.3.30	NA	NA
Measurement Software	Agilent	EN RF test	1.1501125	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	Radiated Emissions				
Test Site	Fully-anechoic chamber 1 / (05CH01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	Agilent	N9010A	MY54200247	Aug. 24, 2015	Aug. 23, 2016
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-524	Oct. 03, 2015	Oct. 02, 2016
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1094	Oct. 20, 2015	Oct. 19, 2016
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 04, 2016	Jan. 03, 2017
Preamplifier	Agilent	83017A	MY39501310	Dec. 11, 2015	Dec. 10, 2016
Preamplifier	EMC	EMC02325	980146	Oct. 14, 2015	Oct. 13, 2016
Preamplifier	EMC	EMC184045B	980192	Sep. 01, 2015	Aug. 31, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16609/4	Dec. 04, 2015	Dec. 03, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16608/4	Dec. 04, 2015	Dec. 03, 2016
RF Cable	HUBER+SUHNER	SUCOFLEX104	MY16617/4	Dec. 04, 2015	Dec. 03, 2016
LF cable 3M	Woken	CFD400NL-LW	CFD400NL-005	Dec. 04, 2015	Dec. 03, 2016
LF cable 10M	Woken	CFD400NL-LW	CFD400NL-006	Dec. 04, 2015	Dec. 03, 2016
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

Test Item	RF Conducted				
Test Site	(DF01-WS)				
Instrument	Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum	R&S	FSV-7	101607	Dec. 10, 2015	Dec. 09, 2016
Spectrum	Keysight	N9010A	MY54510374	May. 18, 2015	May. 17, 2016
Signal Generator	R&S	SMB100A	175727	Oct. 05, 2015	Oct. 04, 2016
RF cable-4M	HUBER+SUHNER	SUCOFLEX_104	MY15686/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.5M	HUBER+SUHNER	SUCOFLEX_104	296081/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.2M	HUBER+SUHNER	SUCOFLEX_104	329023/4	Dec. 17, 2015	Dec. 16, 2016
RF cable-0.2M	HUBER+SUHNER	SUCOFLEX_104	329021/4	Dec. 17, 2015	Dec. 16, 2016
MXG-B RF Vector Signal Generator	Agilent	N5182B	MY53050081	Mar. 30, 2015	Mar. 29, 2016
Preamplifier	EMC	EMC02325	980146	Oct. 14, 2015	Oct. 13, 2016
Oscilloscope	National Instruments	USB-5133	F651FF	Jun. 15, 2015	Jun. 14, 2016
Measurement Software	Sporton	Sporton_3	1.0.0.22	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

1.5 Testing Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

EN 301 893 V1.8.1 (2015-03)

1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

Measurement Uncertainty		
Parameters	Uncertainty	Limit
Radio Frequency	$\pm 1.4 \times 10^{-9}$	$\pm 1 \times 10^{-5}$
RF power conducted	± 0.808 dB	± 1.5 dB
RF power radiated	± 3.398 dB	± 6 dB
Spurious emission, conducted	± 2.470 dB	± 3 dB
Spurious emission, radiated	± 3.398 dB	± 6 dB
Humidity	$\pm 4.7\%$	$\pm 5\%$
Temperature	± 0.8 °C	± 1 °C
Time	$\pm 0.1\%$	$\pm 10\%$

2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
RF Conducted	TH01-WS	23°C / 63%	Ryan Lee
Radiated Emission	05CH01-WS	19°C / 70%	Ryan Lee
Adaptivity	DF01-WS	24°C / 63%	Ryan Lee

2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode	Test Frequency (MHz)	Data Rate
Centre Frequencies RF Output Power Power Spectral Density	11a HT20	5180 / 5320 / 5500 / 5700 5180 / 5320 / 5500 / 5700	1, 2, 3
Occupied Channel Bandwidth	11a HT20	5180 / 5320 / 5500 / 5700 5180 / 5320 / 5500 / 5700	1
Transmitter Unwanted Emissions within the 5 GHz RLAN Band	11a HT20	5180 / 5700 5180 / 5700	1
Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands (below 1GHz test)	11a HT20	5180 / 5320 / 5500 / 5700 5180 / 5320 / 5500 / 5700	Note 2
Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands (above 1GHz test)	11a HT20	5180 / 5320 / 5500 / 5700 5180 / 5320 / 5500 / 5700	Note 2
Receiver Spurious Emissions	11a HT20	5180 / 5700 5180 / 5700	Note 2
Adaptivity	HT20	5180 / 5500	1
NOTE: 1. 3 types antenna are used for this device, highest gain antenna of each type is selected to perform radiated emission test as below test configuration. 1) Configuration 1 : Dipole antenna (Antenna No.1) 2) Configuration 2 : PCB Dipole antenna (Antenna No.3) 3) Configuration 3 : PIFA antenna (Antenna No.6) 2. Conducted and radiated emissions are measured. A 50 Ω terminator is connected to antenna port of EUT for radiated emission measurement.			

3 Transmitter Test Results

3.1 Carrier Frequencies


3.1.1 Limit of Carrier Frequencies

The actual centre frequency for any given channel declared by the manufacturer shall be maintained within the range $f_c \pm 20$ ppm.

3.1.2 Test Procedures

Reference to clause 5.3.2.2 of ETSI EN 301 893 V1.8.1 (2015-03).

3.1.3 Test Setup

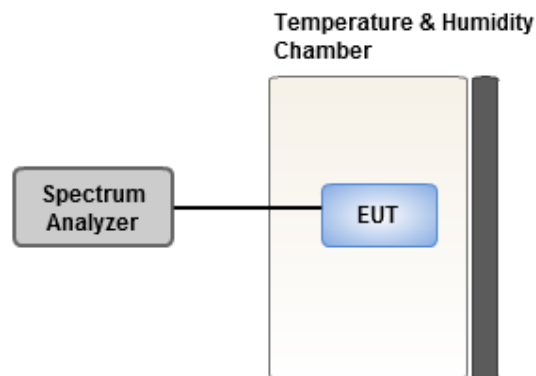

3.1.4 Test Result of Carrier Frequencies

Test Configuration		1			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11a	5180	5180.00470	0.91	20
$T_{min}V_{max}$	802.11a	5180	5180.00670	1.29	20
$T_{min}V_{min}$	802.11a	5180	5180.00670	1.29	20
$T_{max}V_{max}$	802.11a	5180	5180.00470	0.91	20
$T_{max}V_{min}$	802.11a	5180	5180.00470	0.91	20
$T_{nom}V_{nom}$	802.11a	5320	5320.00650	1.22	20
$T_{min}V_{max}$	802.11a	5320	5320.00850	1.60	20
$T_{min}V_{min}$	802.11a	5320	5320.00850	1.60	20
$T_{max}V_{max}$	802.11a	5320	5320.00650	1.22	20
$T_{max}V_{min}$	802.11a	5320	5320.00650	1.22	20
$T_{nom}V_{nom}$	802.11a	5500	5500.00690	1.25	20
$T_{min}V_{max}$	802.11a	5500	5500.00890	1.62	20
$T_{min}V_{min}$	802.11a	5500	5500.00890	1.62	20
$T_{max}V_{max}$	802.11a	5500	5500.00690	1.25	20
$T_{max}V_{min}$	802.11a	5500	5500.00690	1.25	20
$T_{nom}V_{nom}$	802.11a	5700	5700.00620	1.09	20
$T_{min}V_{max}$	802.11a	5700	5700.00820	1.44	20
$T_{min}V_{min}$	802.11a	5700	5700.00820	1.44	20
$T_{max}V_{max}$	802.11a	5700	5700.00620	1.09	20
$T_{max}V_{min}$	802.11a	5700	5700.00620	1.09	20

Test Configuration		1			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{min}V_{max}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{min}V_{min}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{max}V_{max}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{max}V_{min}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{nom}V_{nom}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{min}V_{max}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{min}V_{min}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{max}V_{max}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{max}V_{min}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{nom}V_{nom}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{min}V_{max}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{min}V_{min}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{max}V_{max}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{max}V_{min}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{nom}V_{nom}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{min}V_{max}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{min}V_{min}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{max}V_{max}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{max}V_{min}$	802.11n HT20	5700	5700.00670	1.18	20

Test Configuration		2			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11a	5180	5180.00470	0.91	20
$T_{min}V_{max}$	802.11a	5180	5180.00670	1.29	20
$T_{min}V_{min}$	802.11a	5180	5180.00670	1.29	20
$T_{max}V_{max}$	802.11a	5180	5180.00470	0.91	20
$T_{max}V_{min}$	802.11a	5180	5180.00470	0.91	20
$T_{nom}V_{nom}$	802.11a	5320	5320.00650	1.22	20
$T_{min}V_{max}$	802.11a	5320	5320.00850	1.60	20
$T_{min}V_{min}$	802.11a	5320	5320.00850	1.60	20
$T_{max}V_{max}$	802.11a	5320	5320.00650	1.22	20
$T_{max}V_{min}$	802.11a	5320	5320.00650	1.22	20
$T_{nom}V_{nom}$	802.11a	5500	5500.00690	1.25	20
$T_{min}V_{max}$	802.11a	5500	5500.00890	1.62	20
$T_{min}V_{min}$	802.11a	5500	5500.00890	1.62	20
$T_{max}V_{max}$	802.11a	5500	5500.00690	1.25	20
$T_{max}V_{min}$	802.11a	5500	5500.00690	1.25	20
$T_{nom}V_{nom}$	802.11a	5700	5700.00620	1.09	20
$T_{min}V_{max}$	802.11a	5700	5700.00820	1.44	20
$T_{min}V_{min}$	802.11a	5700	5700.00820	1.44	20
$T_{max}V_{max}$	802.11a	5700	5700.00620	1.09	20
$T_{max}V_{min}$	802.11a	5700	5700.00620	1.09	20

Test Configuration		2			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{min}V_{max}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{min}V_{min}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{max}V_{max}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{max}V_{min}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{nom}V_{nom}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{min}V_{max}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{min}V_{min}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{max}V_{max}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{max}V_{min}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{nom}V_{nom}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{min}V_{max}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{min}V_{min}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{max}V_{max}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{max}V_{min}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{nom}V_{nom}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{min}V_{max}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{min}V_{min}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{max}V_{max}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{max}V_{min}$	802.11n HT20	5700	5700.00670	1.18	20

Test Configuration		3			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11a	5180	5180.00470	0.91	20
$T_{min}V_{max}$	802.11a	5180	5180.00670	1.29	20
$T_{min}V_{min}$	802.11a	5180	5180.00670	1.29	20
$T_{max}V_{max}$	802.11a	5180	5180.00470	0.91	20
$T_{max}V_{min}$	802.11a	5180	5180.00470	0.91	20
$T_{nom}V_{nom}$	802.11a	5320	5320.00650	1.22	20
$T_{min}V_{max}$	802.11a	5320	5320.00850	1.60	20
$T_{min}V_{min}$	802.11a	5320	5320.00850	1.60	20
$T_{max}V_{max}$	802.11a	5320	5320.00650	1.22	20
$T_{max}V_{min}$	802.11a	5320	5320.00650	1.22	20
$T_{nom}V_{nom}$	802.11a	5500	5500.00690	1.25	20
$T_{min}V_{max}$	802.11a	5500	5500.00890	1.62	20
$T_{min}V_{min}$	802.11a	5500	5500.00890	1.62	20
$T_{max}V_{max}$	802.11a	5500	5500.00690	1.25	20
$T_{max}V_{min}$	802.11a	5500	5500.00690	1.25	20
$T_{nom}V_{nom}$	802.11a	5700	5700.00620	1.09	20
$T_{min}V_{max}$	802.11a	5700	5700.00820	1.44	20
$T_{min}V_{min}$	802.11a	5700	5700.00820	1.44	20
$T_{max}V_{max}$	802.11a	5700	5700.00620	1.09	20
$T_{max}V_{min}$	802.11a	5700	5700.00620	1.09	20

Test Configuration		3			
Condition	Modulation Mode	Freq. (MHz)	Carrier Centre Frequencies (ppm)		Limit (ppm)
			Frequency (MHz)	Carrier Stability	
$T_{nom}V_{nom}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{min}V_{max}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{min}V_{min}$	802.11n HT20	5180	5180.00780	1.51	20
$T_{max}V_{max}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{max}V_{min}$	802.11n HT20	5180	5180.00580	1.12	20
$T_{nom}V_{nom}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{min}V_{max}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{min}V_{min}$	802.11n HT20	5320	5320.00820	1.54	20
$T_{max}V_{max}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{max}V_{min}$	802.11n HT20	5320	5320.00620	1.17	20
$T_{nom}V_{nom}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{min}V_{max}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{min}V_{min}$	802.11n HT20	5500	5500.00830	1.51	20
$T_{max}V_{max}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{max}V_{min}$	802.11n HT20	5500	5500.00630	1.15	20
$T_{nom}V_{nom}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{min}V_{max}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{min}V_{min}$	802.11n HT20	5700	5700.00870	1.53	20
$T_{max}V_{max}$	802.11n HT20	5700	5700.00670	1.18	20
$T_{max}V_{min}$	802.11n HT20	5700	5700.00670	1.18	20

3.2 Occupied Channel Bandwidth

3.2.1 Limit of Occupied Channel Bandwidth


The Nominal Channel Bandwidth shall be at least 5 MHz at all times.

The Occupied Channel Bandwidth shall be between 80 % and 100 % of the declared Nominal Channel Bandwidth. In case of smart antenna systems (devices with multiple transmit chains) each of the transmit chains shall meet this requirement.

3.2.2 Test Procedures

Reference to clause 5.3.3.2 of ETSI EN 301 893 V1.8.1 (2015-03).

3.2.3 Test Setup



3.2.4 Test Result of Occupied Channel Bandwidth

Test Configuration	1		
Modulation Mode	Frequency (MHz)	Occupied Channel Bandwidth (MHz)	Occupied Channel Bandwidth Limit (MHz)
802.11a	5180	16.44	16-20
802.11a	5320	16.44	16-20
802.11a	5500	16.44	16-20
802.11a	5700	16.44	16-20
802.11n HT20	5180	17.66	16-20
802.11n HT20	5320	17.60	16-20
802.11n HT20	5500	17.60	16-20
802.11n HT20	5700	17.60	16-20

3.3 RF Output Power, Transmit Power Control (TPC) and Power density

3.3.1 Limit of RF Output Power, Transmit Power Control (TPC) and Power density

E.I.R.P limits for RF output power and power density at the highest power level

Frequency range (MHz)	Mean e.i.r.p. limit [dBm]		Mean e.i.r.p. density limit [dBm/MHz]	
	With TPC	Without TPC	With TPC	Without TPC
5150 to 5350	23	20 / 23 (see note 1)	10	7 / 10 (see note 2)
5470 to 5725	30 (see note 3)	27 (see note 3)	17 (see note 3)	14 (see note 3)

Note 1: The applicable limit is 20 dBm, except for transmissions whose nominal bandwidth falls completely within the band 5150 MHz to 5250 MHz, in which case the applicable limit is 23 dBm.
 Note 2: The applicable limit is 7 dBm/MHz except for transmissions whose nominal bandwidth falls completely within the band 5150 MHz to 5250 MHz, in which case the applicable limit is 10 dBm/MHz.
 Note 3: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5250 MHz to 5350 MHz.

E.I.R.P limits for RF output power at the lowest power level

Frequency range (MHz)	Mean e.i.r.p. [dBm]
5250 to 5350	17
5470 to 5725	24 (see note)


Note: Slave devices without a Radar Interference Detection function shall comply with the limits for the band 5250 MHz to 5350 MHz.

3.3.2 Test Procedures


Reference to clause 5.3.4.2 of ETSI EN 301 893 V1.8.1 (2015-03).

3.3.3 Test Setup

For RF Output Power, Transmit Power Control (TPC)

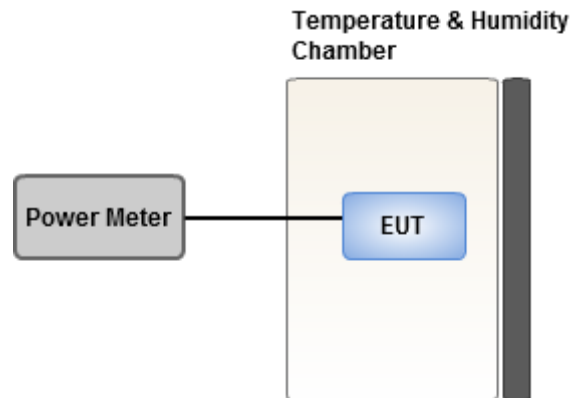

For Power Density



3.3.4 Test Result of RF Output Power at the Highest Power

Test Configuration	1		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5180	19.04	23
T _{min} V _{max}	5180	18.65	23
T _{min} V _{min}	5180	18.67	23
T _{max} V _{max}	5180	18.12	23
T _{max} V _{min}	5180	18.09	23
T _{nom} V _{nom}	5320	19.58	23
T _{min} V _{max}	5320	20.10	23
T _{min} V _{min}	5320	20.12	23
T _{max} V _{max}	5320	19.90	23
T _{max} V _{min}	5320	19.88	23
T _{nom} V _{nom}	5500	19.46	23
T _{min} V _{max}	5500	19.80	23
T _{min} V _{min}	5500	19.82	23
T _{max} V _{max}	5500	18.82	23
T _{max} V _{min}	5500	18.79	23
T _{nom} V _{nom}	5700	19.12	23
T _{min} V _{max}	5700	18.79	23
T _{min} V _{min}	5700	18.82	23
T _{max} V _{max}	5700	17.66	23
T _{max} V _{min}	5700	17.64	23

Test Configuration	1		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5180	19.22	23
T _{min} V _{max}	5180	19.02	23
T _{min} V _{min}	5180	19.05	23
T _{max} V _{max}	5180	18.20	23
T _{max} V _{min}	5180	18.18	23
T _{nom} V _{nom}	5320	19.76	23
T _{min} V _{max}	5320	20.13	23
T _{min} V _{min}	5320	20.15	23
T _{max} V _{max}	5320	19.97	23
T _{max} V _{min}	5320	19.95	23
T _{nom} V _{nom}	5500	19.69	23
T _{min} V _{max}	5500	20.02	23
T _{min} V _{min}	5500	20.05	23
T _{max} V _{max}	5500	18.95	23
T _{max} V _{min}	5500	18.93	23
T _{nom} V _{nom}	5700	18.98	23
T _{min} V _{max}	5700	18.54	23
T _{min} V _{min}	5700	18.56	23
T _{max} V _{max}	5700	17.37	23
T _{max} V _{min}	5700	17.35	23

Test Configuration	2		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5180	21.04	23
T _{min} V _{max}	5180	20.65	23
T _{min} V _{min}	5180	20.67	23
T _{max} V _{max}	5180	20.12	23
T _{max} V _{min}	5180	20.09	23
T _{nom} V _{nom}	5320	21.58	23
T _{min} V _{max}	5320	22.10	23
T _{min} V _{min}	5320	22.12	23
T _{max} V _{max}	5320	21.90	23
T _{max} V _{min}	5320	21.88	23
T _{nom} V _{nom}	5500	21.46	23
T _{min} V _{max}	5500	21.80	23
T _{min} V _{min}	5500	21.82	23
T _{max} V _{max}	5500	20.82	23
T _{max} V _{min}	5500	20.79	23
T _{nom} V _{nom}	5700	21.12	23
T _{min} V _{max}	5700	20.79	23
T _{min} V _{min}	5700	20.82	23
T _{max} V _{max}	5700	19.66	23
T _{max} V _{min}	5700	19.64	23

Test Configuration	2		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5180	21.22	23
T _{min} V _{max}	5180	21.02	23
T _{min} V _{min}	5180	21.05	23
T _{max} V _{max}	5180	20.20	23
T _{max} V _{min}	5180	20.18	23
T _{nom} V _{nom}	5320	21.76	23
T _{min} V _{max}	5320	22.13	23
T _{min} V _{min}	5320	22.15	23
T _{max} V _{max}	5320	21.97	23
T _{max} V _{min}	5320	21.95	23
T _{nom} V _{nom}	5500	21.69	23
T _{min} V _{max}	5500	22.02	23
T _{min} V _{min}	5500	22.05	23
T _{max} V _{max}	5500	20.95	23
T _{max} V _{min}	5500	20.93	23
T _{nom} V _{nom}	5700	20.98	23
T _{min} V _{max}	5700	20.54	23
T _{min} V _{min}	5700	20.56	23
T _{max} V _{max}	5700	19.37	23
T _{max} V _{min}	5700	19.35	23

Test Configuration	3		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5180	20.54	23
T _{min} V _{max}	5180	20.15	23
T _{min} V _{min}	5180	20.17	23
T _{max} V _{max}	5180	19.62	23
T _{max} V _{min}	5180	19.59	23
T _{nom} V _{nom}	5320	21.08	23
T _{min} V _{max}	5320	21.60	23
T _{min} V _{min}	5320	21.62	23
T _{max} V _{max}	5320	21.40	23
T _{max} V _{min}	5320	21.38	23
T _{nom} V _{nom}	5500	20.96	23
T _{min} V _{max}	5500	21.30	23
T _{min} V _{min}	5500	21.32	23
T _{max} V _{max}	5500	20.32	23
T _{max} V _{min}	5500	20.29	23
T _{nom} V _{nom}	5700	20.62	23
T _{min} V _{max}	5700	20.29	23
T _{min} V _{min}	5700	20.32	23
T _{max} V _{max}	5700	19.16	23
T _{max} V _{min}	5700	19.14	23

Test Configuration	3		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5180	20.72	23
T _{min} V _{max}	5180	20.52	23
T _{min} V _{min}	5180	20.55	23
T _{max} V _{max}	5180	19.70	23
T _{max} V _{min}	5180	19.68	23
T _{nom} V _{nom}	5320	21.26	23
T _{min} V _{max}	5320	21.63	23
T _{min} V _{min}	5320	21.65	23
T _{max} V _{max}	5320	21.47	23
T _{max} V _{min}	5320	21.45	23
T _{nom} V _{nom}	5500	21.19	23
T _{min} V _{max}	5500	21.52	23
T _{min} V _{min}	5500	21.55	23
T _{max} V _{max}	5500	20.45	23
T _{max} V _{min}	5500	20.43	23
T _{nom} V _{nom}	5700	20.48	23
T _{min} V _{max}	5700	20.04	23
T _{min} V _{min}	5700	20.06	23
T _{max} V _{max}	5700	18.87	23
T _{max} V _{min}	5700	18.85	23

3.3.5 Test Result of RF Output Power at the Lowest Power

Test Configuration	1		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5320	13.58	17
T _{min} V _{max}	5320	14.10	17
T _{min} V _{min}	5320	14.12	17
T _{max} V _{max}	5320	13.90	17
T _{max} V _{min}	5320	13.88	17
T _{nom} V _{nom}	5500	13.46	17
T _{min} V _{max}	5500	13.80	17
T _{min} V _{min}	5500	13.82	17
T _{max} V _{max}	5500	12.82	17
T _{max} V _{min}	5500	12.79	17
T _{nom} V _{nom}	5700	13.12	17
T _{min} V _{max}	5700	12.79	17
T _{min} V _{min}	5700	12.82	17
T _{max} V _{max}	5700	11.66	17
T _{max} V _{min}	5700	11.64	17

Test Configuration	1		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5320	13.76	17
T _{min} V _{max}	5320	14.13	17
T _{min} V _{min}	5320	14.15	17
T _{max} V _{max}	5320	13.97	17
T _{max} V _{min}	5320	13.95	17
T _{nom} V _{nom}	5500	13.69	17
T _{min} V _{max}	5500	14.02	17
T _{min} V _{min}	5500	14.05	17
T _{max} V _{max}	5500	12.95	17
T _{max} V _{min}	5500	12.93	17
T _{nom} V _{nom}	5700	12.98	17
T _{min} V _{max}	5700	12.54	17
T _{min} V _{min}	5700	12.56	17
T _{max} V _{max}	5700	11.37	17
T _{max} V _{min}	5700	11.35	17

Test Configuration	2		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5320	15.58	17
T _{min} V _{max}	5320	16.10	17
T _{min} V _{min}	5320	16.12	17
T _{max} V _{max}	5320	15.90	17
T _{max} V _{min}	5320	15.88	17
T _{nom} V _{nom}	5500	15.46	17
T _{min} V _{max}	5500	15.80	17
T _{min} V _{min}	5500	15.82	17
T _{max} V _{max}	5500	14.82	17
T _{max} V _{min}	5500	14.79	17
T _{nom} V _{nom}	5700	15.12	17
T _{min} V _{max}	5700	14.79	17
T _{min} V _{min}	5700	14.82	17
T _{max} V _{max}	5700	13.66	17
T _{max} V _{min}	5700	13.64	17

Test Configuration	2		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5320	15.76	17
T _{min} V _{max}	5320	16.13	17
T _{min} V _{min}	5320	16.15	17
T _{max} V _{max}	5320	15.97	17
T _{max} V _{min}	5320	15.95	17
T _{nom} V _{nom}	5500	15.69	17
T _{min} V _{max}	5500	16.02	17
T _{min} V _{min}	5500	16.05	17
T _{max} V _{max}	5500	14.95	17
T _{max} V _{min}	5500	14.93	17
T _{nom} V _{nom}	5700	14.98	17
T _{min} V _{max}	5700	14.54	17
T _{min} V _{min}	5700	14.56	17
T _{max} V _{max}	5700	13.37	17
T _{max} V _{min}	5700	13.35	17

Test Configuration	3		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11a	Limit (dBm)
T _{nom} V _{nom}	5320	15.08	17
T _{min} V _{max}	5320	15.60	17
T _{min} V _{min}	5320	15.62	17
T _{max} V _{max}	5320	15.40	17
T _{max} V _{min}	5320	15.38	17
T _{nom} V _{nom}	5500	14.96	17
T _{min} V _{max}	5500	15.30	17
T _{min} V _{min}	5500	15.32	17
T _{max} V _{max}	5500	14.32	17
T _{max} V _{min}	5500	14.29	17
T _{nom} V _{nom}	5700	14.62	17
T _{min} V _{max}	5700	14.29	17
T _{min} V _{min}	5700	14.32	17
T _{max} V _{max}	5700	13.16	17
T _{max} V _{min}	5700	13.14	17

Test Configuration	3		
Maximum Transmit Power (dBm)			
Condition	Freq. (MHz)	802.11n HT20	Limit (dBm)
T _{nom} V _{nom}	5320	15.26	17
T _{min} V _{max}	5320	15.63	17
T _{min} V _{min}	5320	15.65	17
T _{max} V _{max}	5320	15.47	17
T _{max} V _{min}	5320	15.45	17
T _{nom} V _{nom}	5500	15.19	17
T _{min} V _{max}	5500	15.52	17
T _{min} V _{min}	5500	15.55	17
T _{max} V _{max}	5500	14.45	17
T _{max} V _{min}	5500	14.43	17
T _{nom} V _{nom}	5700	14.48	17
T _{min} V _{max}	5700	14.04	17
T _{min} V _{min}	5700	14.06	17
T _{max} V _{max}	5700	12.87	17
T _{max} V _{min}	5700	12.85	17

3.3.6 Test Result of Power Density

Test Configuration		1		
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz) e.i.r.p.	Limit (dBm/1MHz) e.i.r.p.	Results
802.11a	5180	7.81	10	Pass
802.11a	5320	8.01	10	Pass
802.11a	5500	7.91	10	Pass
802.11a	5700	7.81	10	Pass
802.11n HT20	5180	7.71	10	Pass
802.11n HT20	5320	7.83	10	Pass
802.11n HT20	5500	7.82	10	Pass
802.11n HT20	5700	7.75	10	Pass

Test Configuration		2		
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz) e.i.r.p.	Limit (dBm/1MHz) e.i.r.p.	Results
802.11a	5180	9.79	10	Pass
802.11a	5320	9.91	10	Pass
802.11a	5500	9.82	10	Pass
802.11a	5700	9.89	10	Pass
802.11n HT20	5180	9.73	10	Pass
802.11n HT20	5320	9.88	10	Pass
802.11n HT20	5500	9.77	10	Pass
802.11n HT20	5700	9.84	10	Pass

Test Configuration		3		
Modulation Mode	Freq. (MHz)	Power Density (dBm/1MHz) e.i.r.p.	Limit (dBm/1MHz) e.i.r.p.	Results
802.11a	5180	9.32	10	Pass
802.11a	5320	9.42	10	Pass
802.11a	5500	9.33	10	Pass
802.11a	5700	9.37	10	Pass
802.11n HT20	5180	9.25	10	Pass
802.11n HT20	5320	9.36	10	Pass
802.11n HT20	5500	9.28	10	Pass
802.11n HT20	5700	9.31	10	Pass

3.4 Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands

3.4.1 Limit of Transmitter Unwanted Emissions outside the 5 GHz RLAN Bands

Frequency Range	Maximum Power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 5,15 GHz	-30 dBm	1 MHz
5,35 GHz to 5,47 GHz	-30 dBm	1 MHz
5,725 GHz to 26 GHz	-30 dBm	1 MHz


3.4.2 Test Procedures

Reference to clause 5.3.5.2 of ETSI EN 301 893 V1.8.1 (2015-03).


3.4.3 Test Setup

For Radiated Test


Below 1GHz

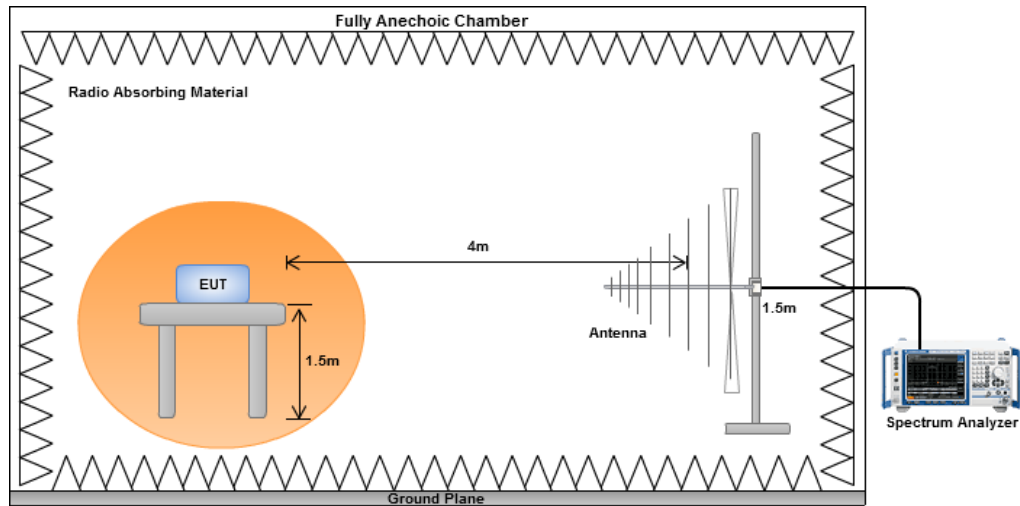


Above 1 GHz

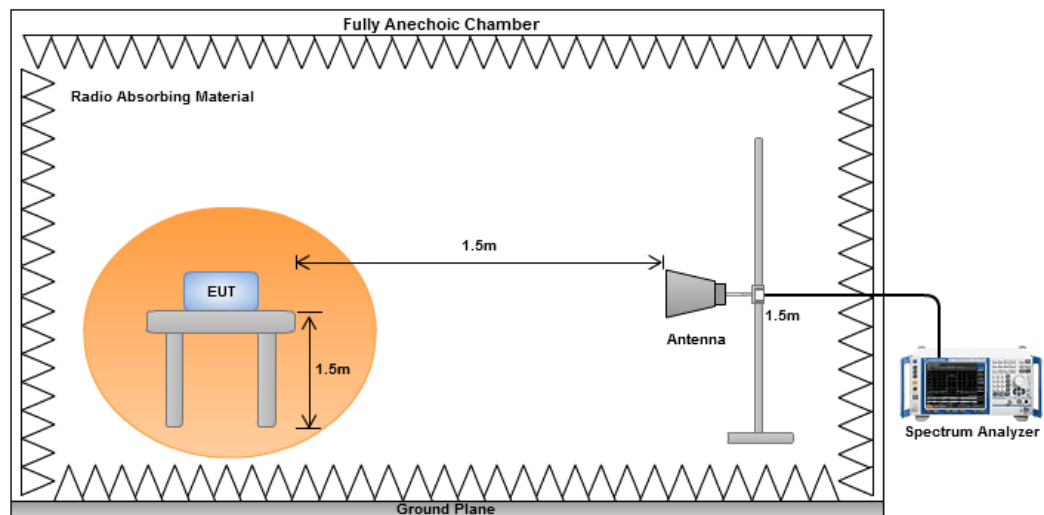

For Conducted Test



Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

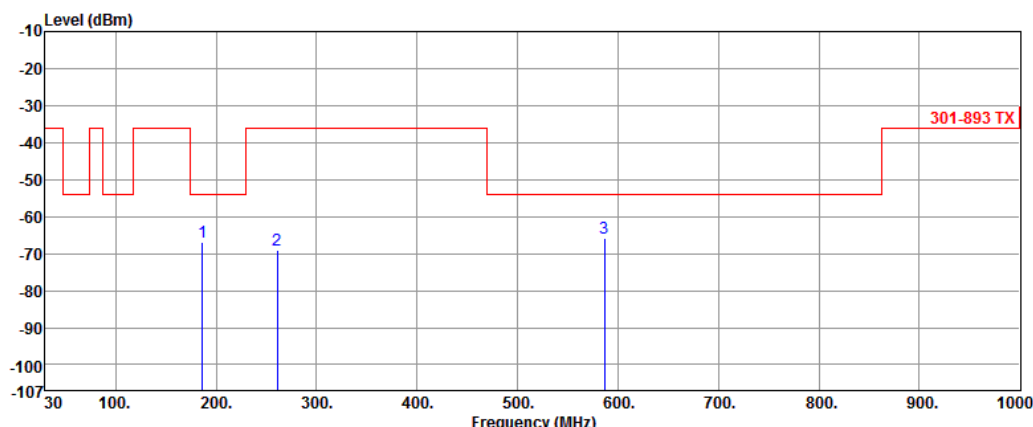


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	186.17	-66.74	-54.00	-12.74	-3.55	-63.19
2	260.86	-69.10	-36.00	-33.10	-2.97	-66.13
3	586.78	-65.91	-54.00	-11.91	5.35	-71.26

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		
</			

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

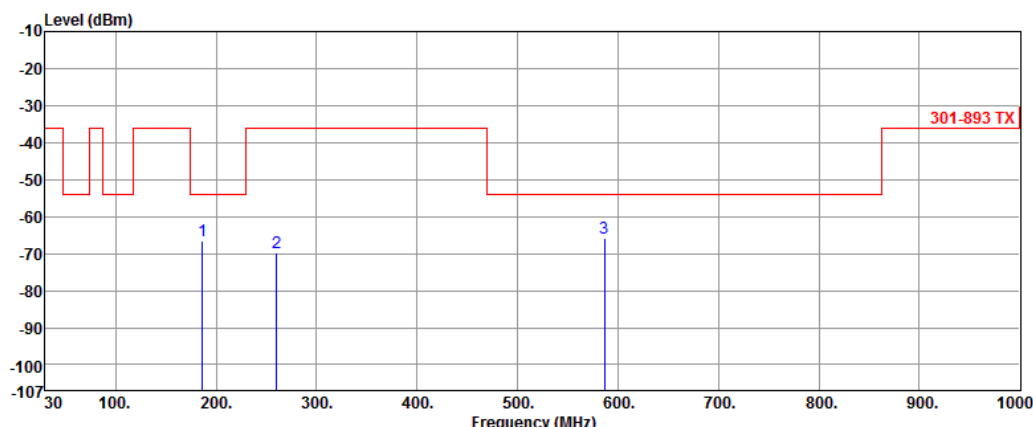


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	186.20	-66.65	-54.00	-12.65	-3.55	-63.10
2	260.20	-69.87	-36.00	-33.87	-3.01	-66.86
3	586.74	-65.85	-54.00	-11.85	5.35	-71.20

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

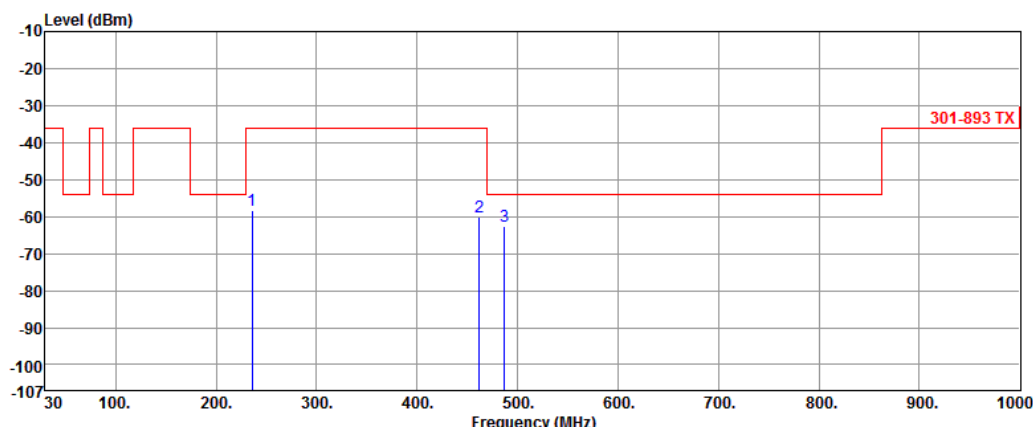


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.07	-58.46	-36.00	-22.46	-1.95	-56.51
2	461.78	-60.07	-36.00	-24.07	2.50	-62.57
3	486.86	-62.68	-54.00	-8.68	2.78	-65.46

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		

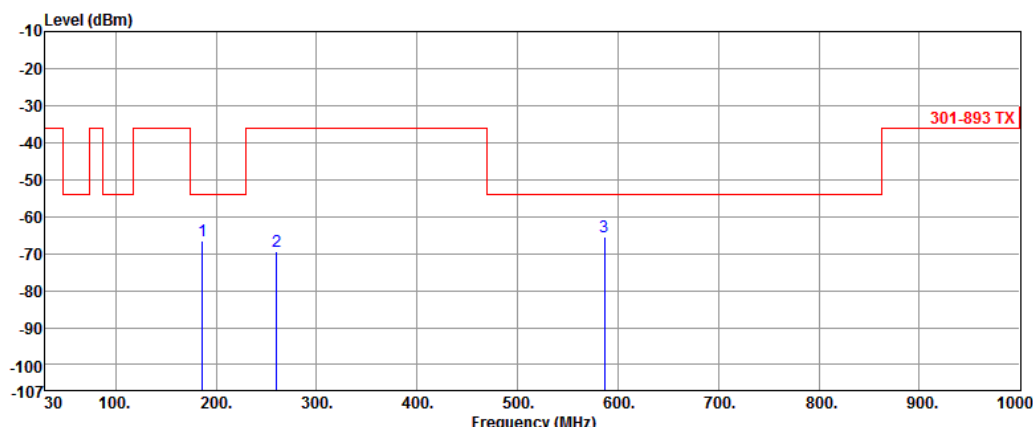

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	186.04	-66.49	-54.00	-12.49	-3.53	-62.96
2	260.41	-69.58	-36.00	-33.58	-3.00	-66.58
3	586.74	-65.50	-54.00	-11.50	5.35	-70.85


Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Horizontal		
<			

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Vertical		
</			

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

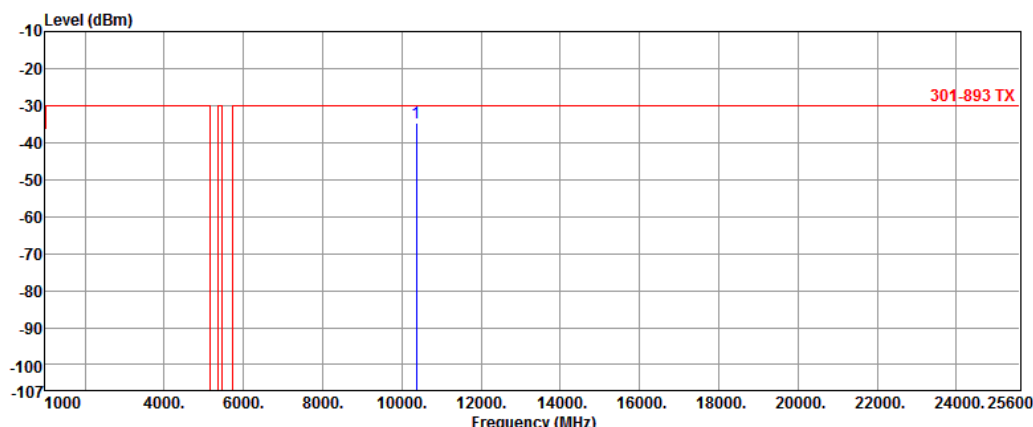


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 10363.25	-34.66	-30.00	-4.66	17.80	-52.46

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

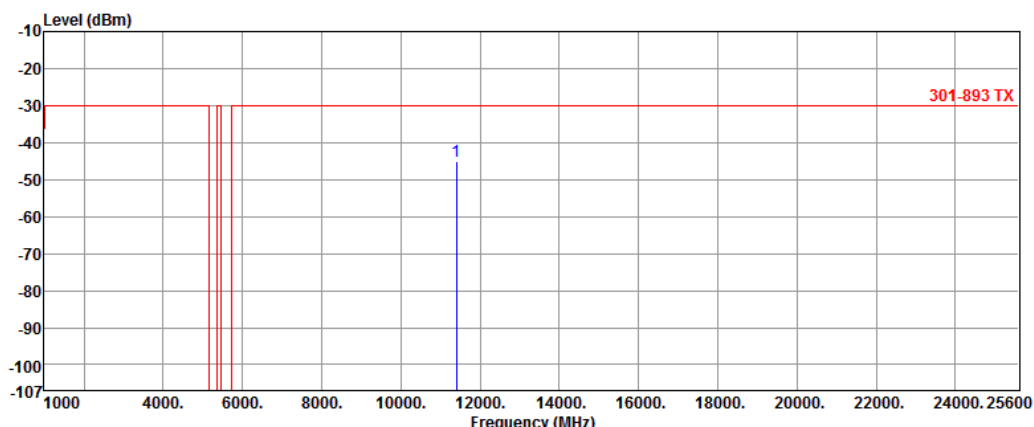


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 11399.60	-45.01	-30.00	-15.01	17.76	-62.77

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

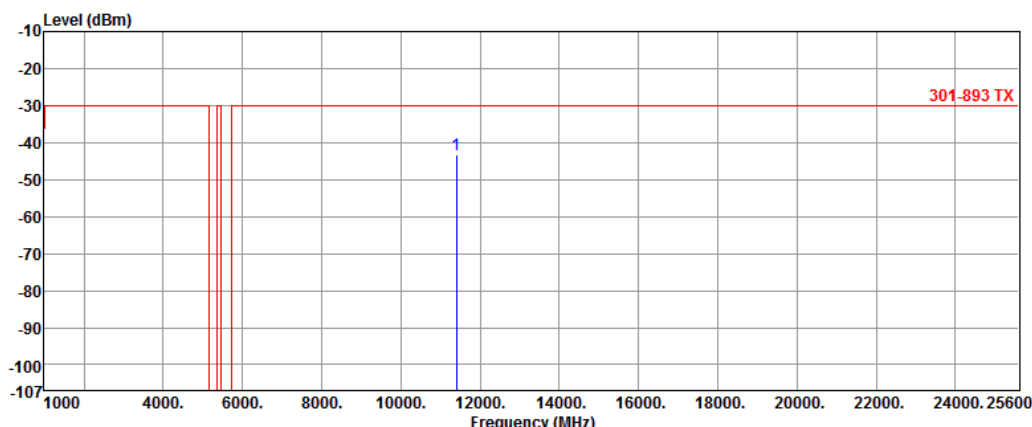


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 11397.35	-43.39	-30.00	-13.39	17.81	-61.20

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Horizontal		
<			

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		

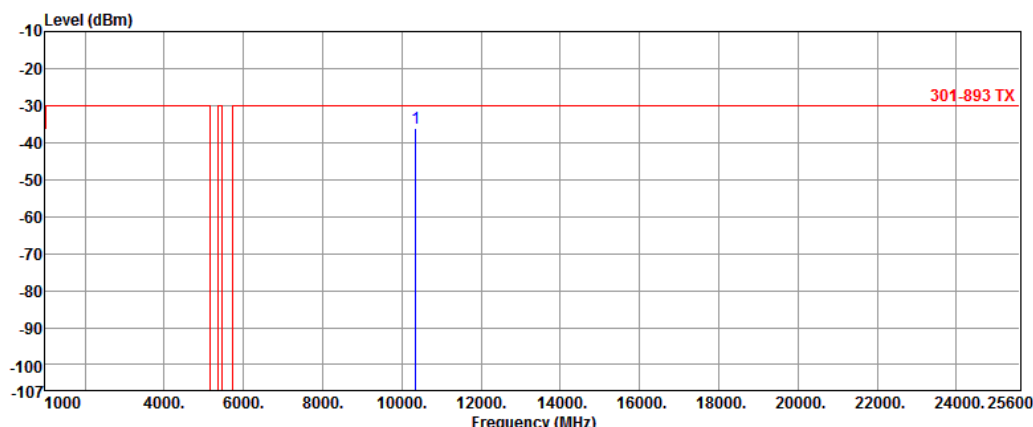


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 10352.40	-36.10	-30.00	-6.10	17.76	-53.86

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

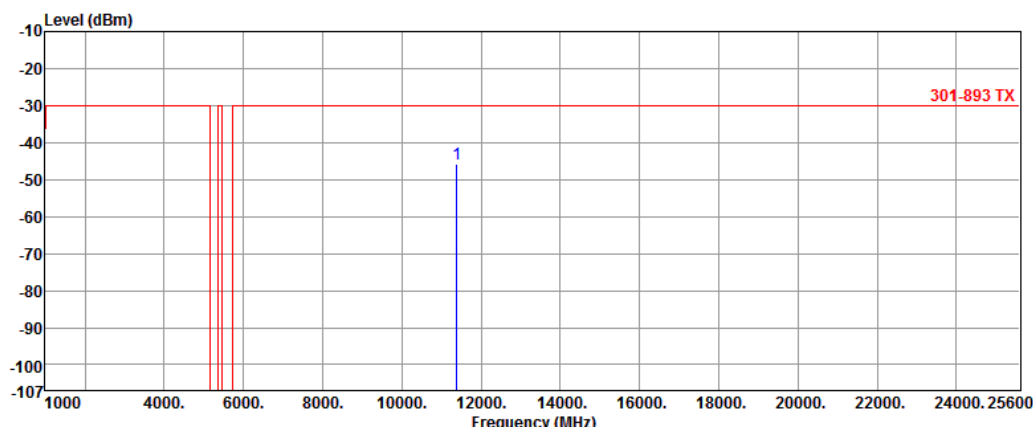


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 11393.55	-45.72	-30.00	-15.72	17.72	-63.44

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Vertical		

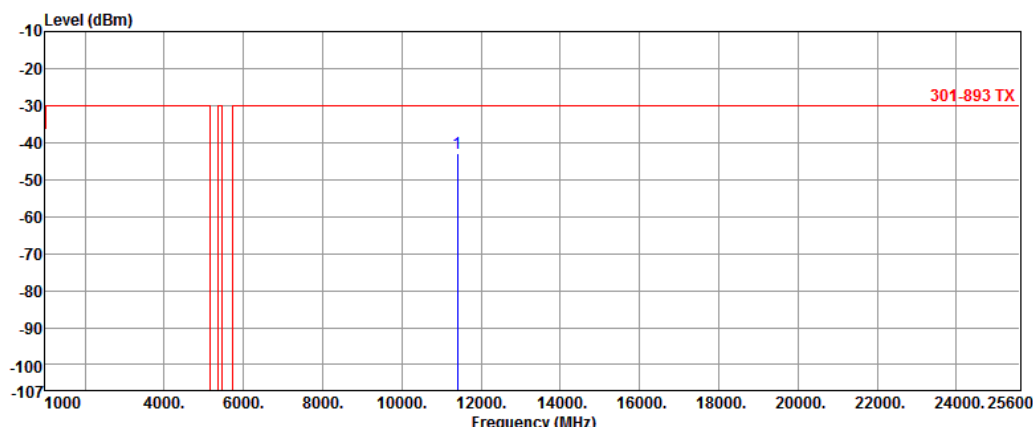

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 11406.45	-43.07	-30.00	-13.07	17.80	-60.87

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

3.4.6 Conducted Results of Transmitter Spurious Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Level (dBm) </			


Modulation	11a	Test Freq. (MHz)	5700

Modulation	HT20	Test Freq. (MHz)	5180

Modulation	HT20	Test Freq. (MHz)	5700

3.4.7 Conducted Results of Transmitter Spurious Emissions (Above 1GHz)


Modulation	11a	Test Freq. (MHz)	5180
------------	-----	------------------	------

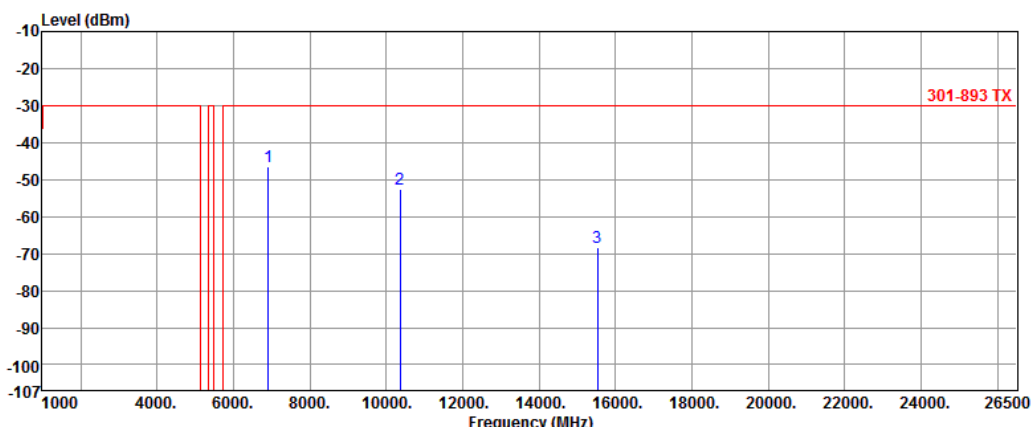

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 6916.00	-46.65	-30.00	-16.65	0.00	-46.65
2 10358.50	-52.53	-30.00	-22.53	0.00	-52.53
3 15535.00	-68.33	-30.00	-38.33	0.00	-68.33

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)


Modulation	11a	Test Freq. (MHz)	5700
------------	-----	------------------	------

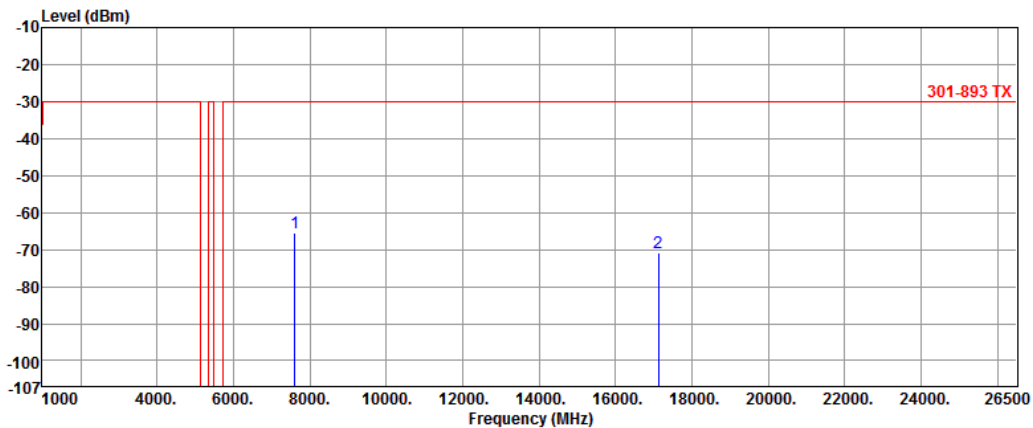

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 7604.50	-65.43	-30.00	-35.43	0.00	-65.43
2 17116.00	-70.78	-30.00	-40.78	0.00	-70.78

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5700
------------	------	------------------	------

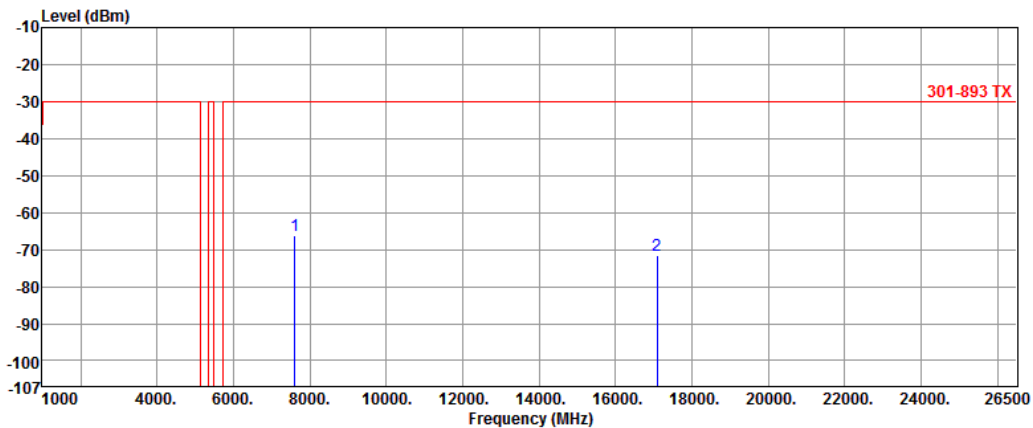


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	7604.50	-66.03	-30.00	-36.03	0.00	-66.03
2	17090.50	-71.64	-30.00	-41.64	0.00	-71.64

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

3.4.8

3.5 Transmitter Unwanted Emissions within the 5 GHz RLAN Band


3.5.1 Limit of Transmitter Unwanted Emissions within the 5 GHz RLAN Band

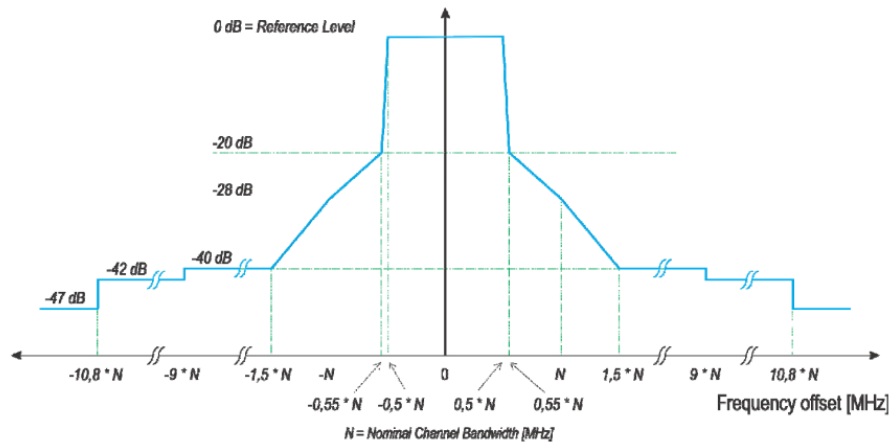


3.5.2 Test Procedures

Reference to clause 5.3.6.2 of ETSI EN 301 893 V1.8.1 (2015-03).


3.5.3 Test Setup



3.5.4 Test Result of Transmitter Unwanted Emissions within the 5 GHz RLAN Band for 802.11a

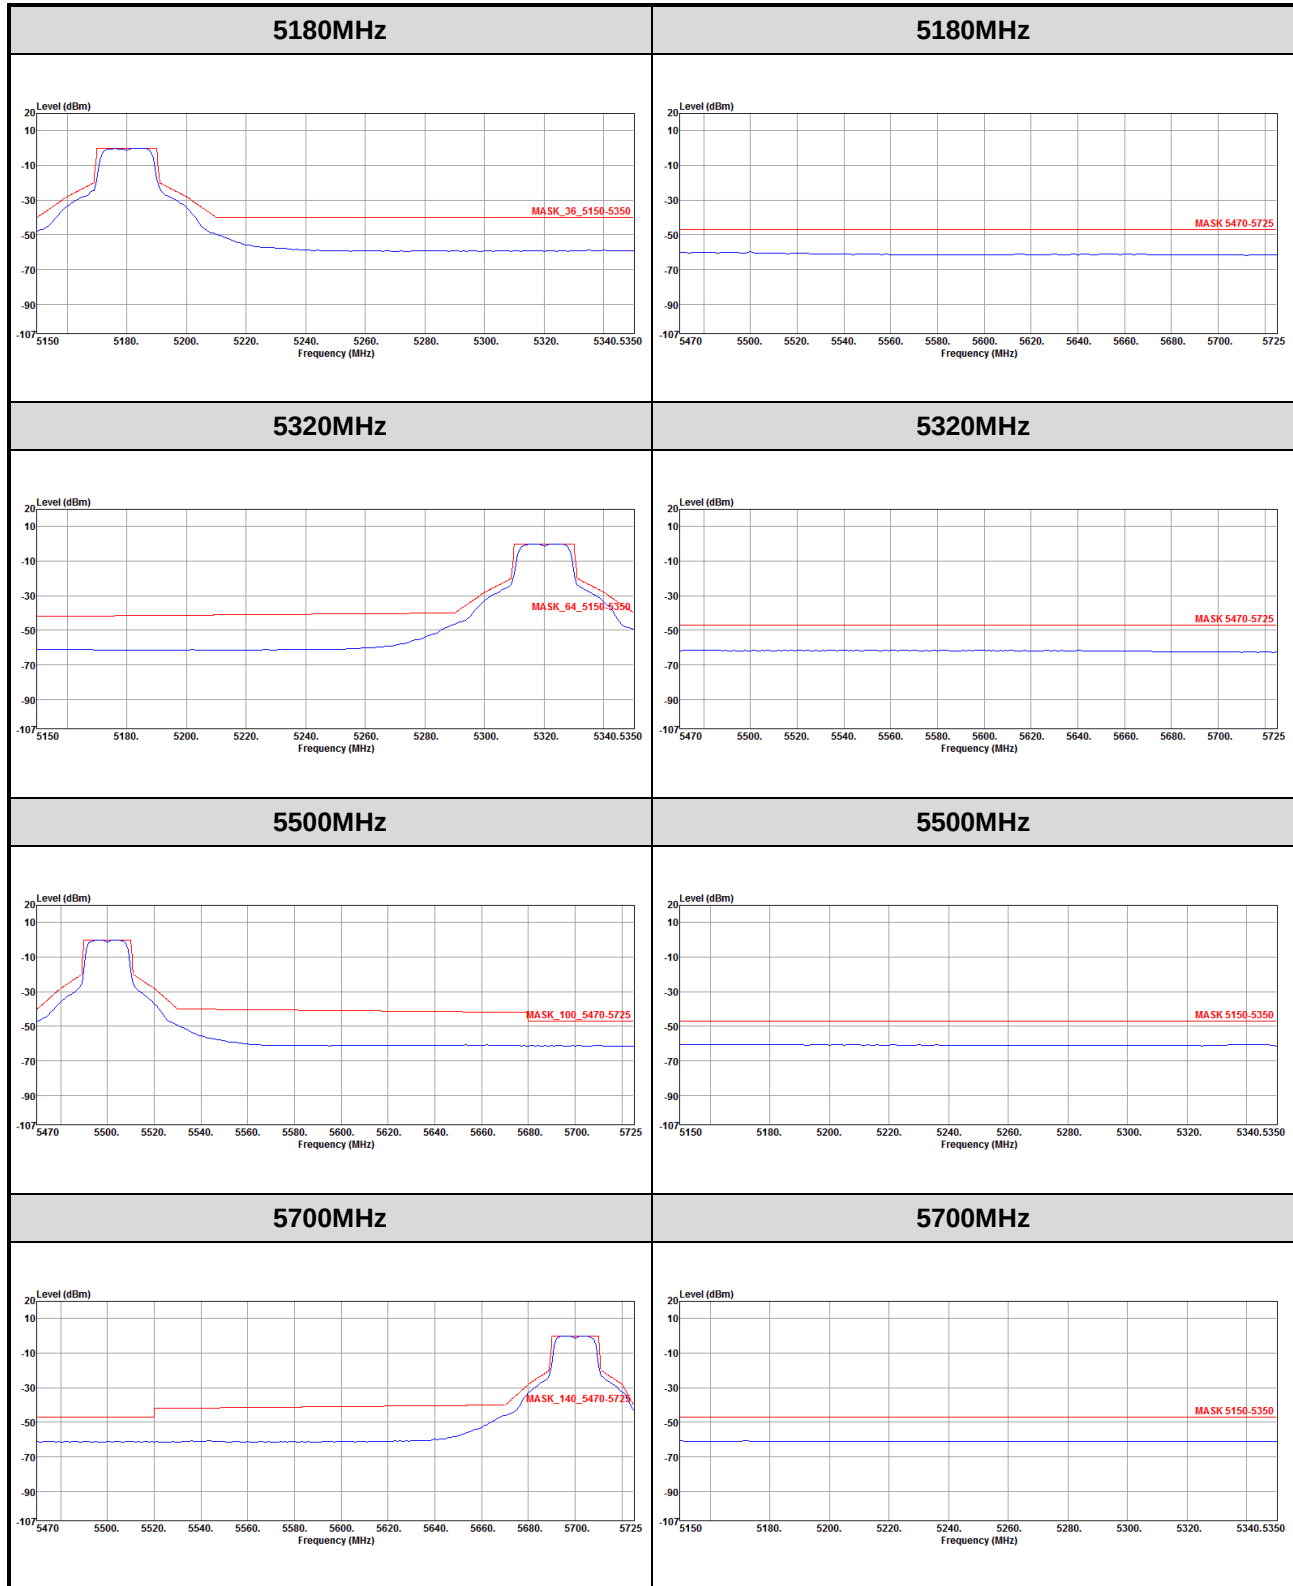

3.5.5 Test Result of Transmitter Unwanted Emissions within the 5 GHz RLAN Band for 802.11n HT20

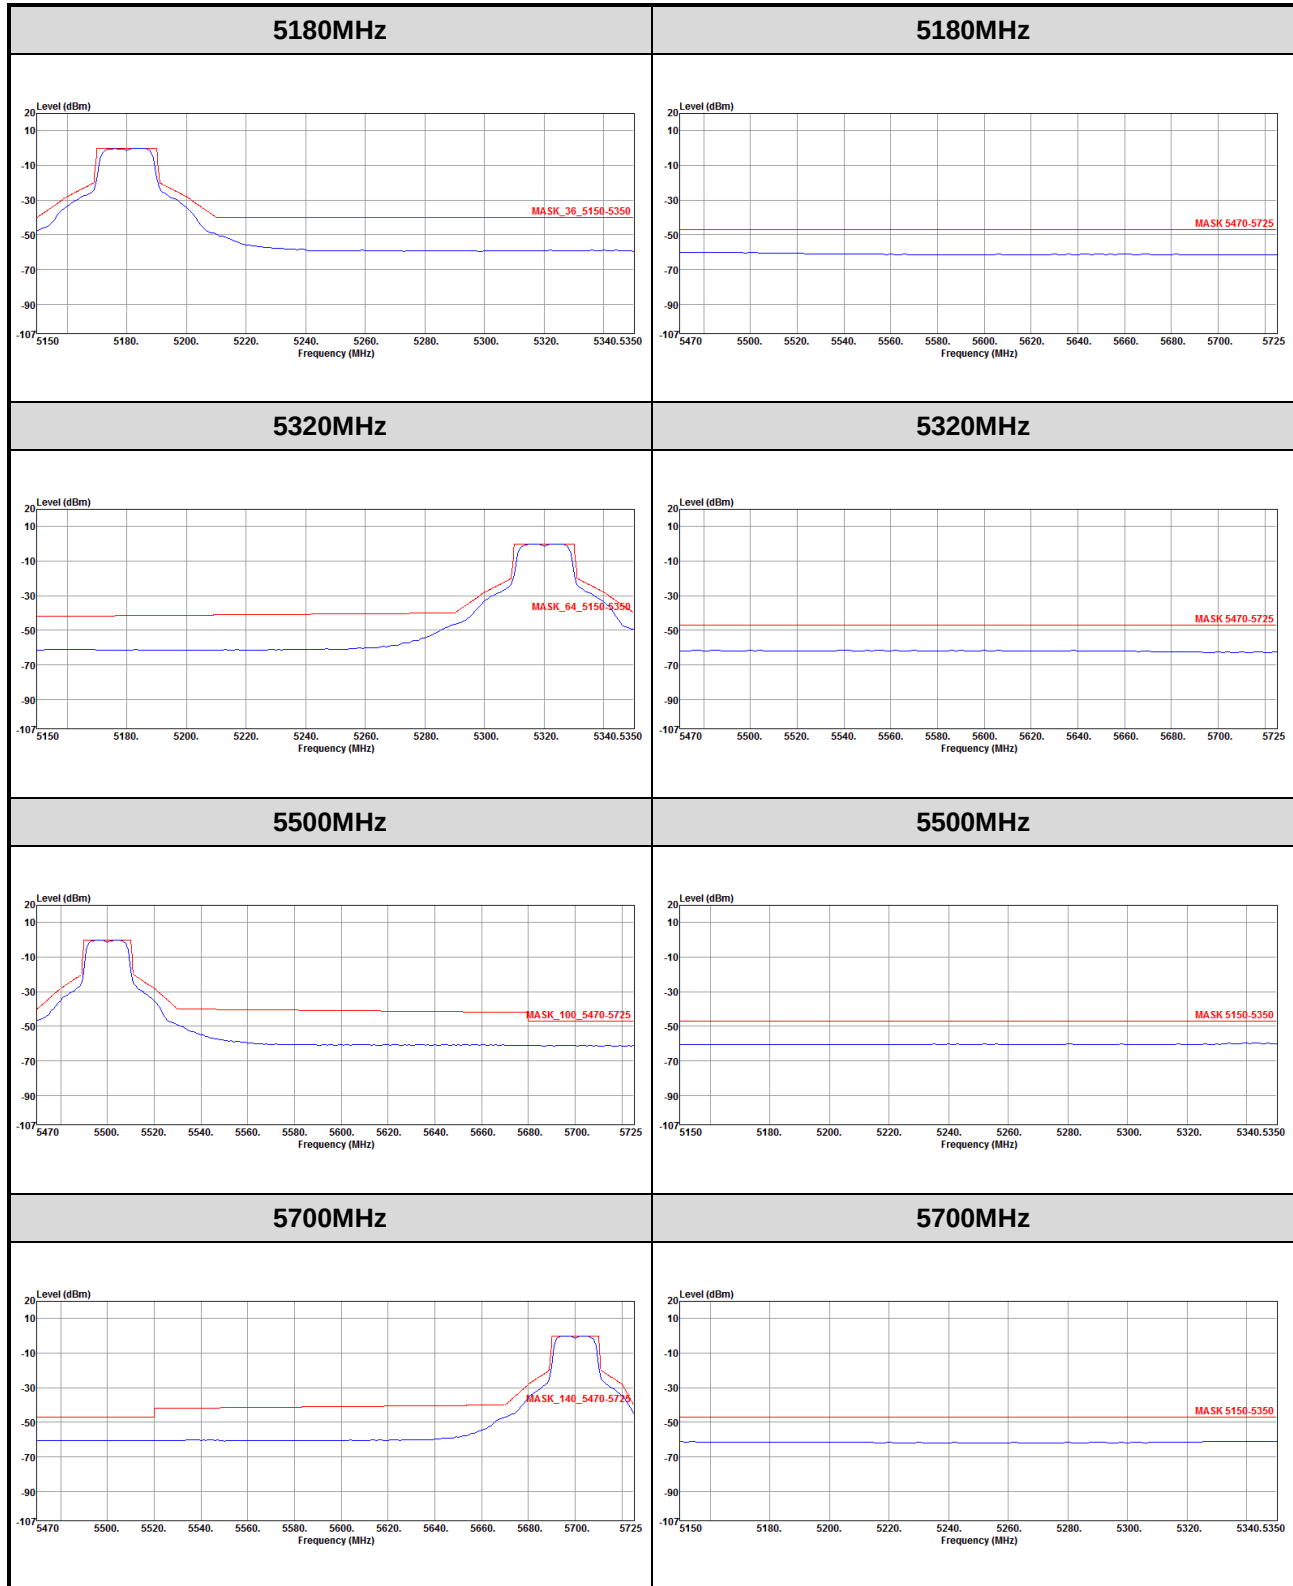

4 Receiver Test Results

4.1 Receiver Spurious Emissions

4.1.1 Limit of Receiver Spurious Emissions

Frequency Range	Maximum power	Measurement bandwidth
30 MHz to 1 GHz	-57 dBm	100kHz
1 GHz to 26 GHz	-47 dBm	1MHz


4.1.2 Test Procedures

Reference to clause 5.3.7.2 of ETSI EN 301 893 V1.8.1 (2015-03).


4.1.3 Test Setup

For Radiated Test


Below 1GHz

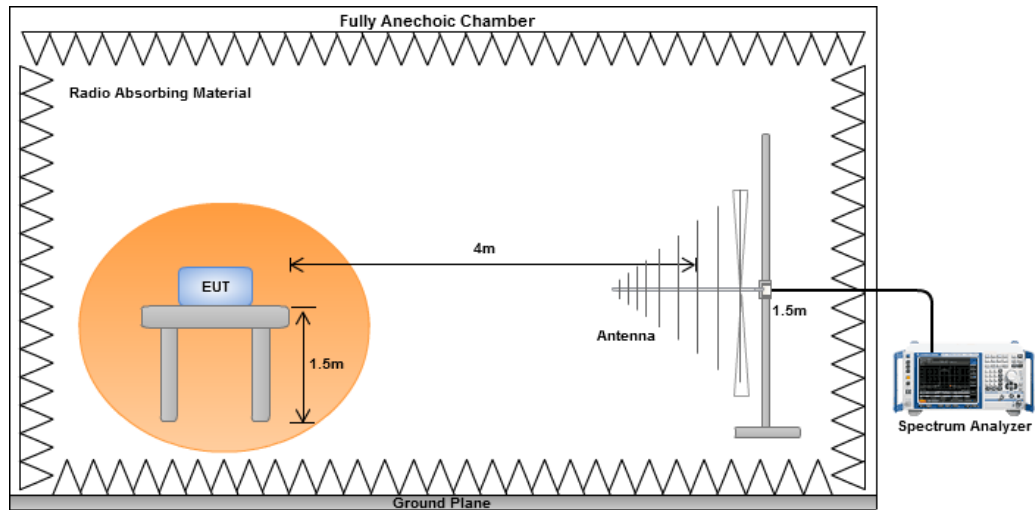

Above 1 GHz

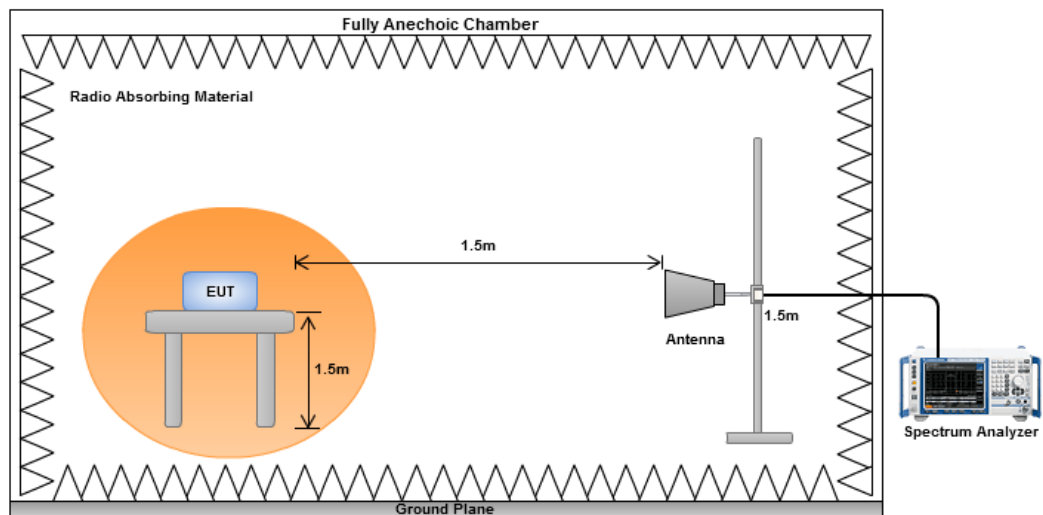


For Conducted Test



4.1.4 Radiated Results of Receiver Spurious Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		
</			

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

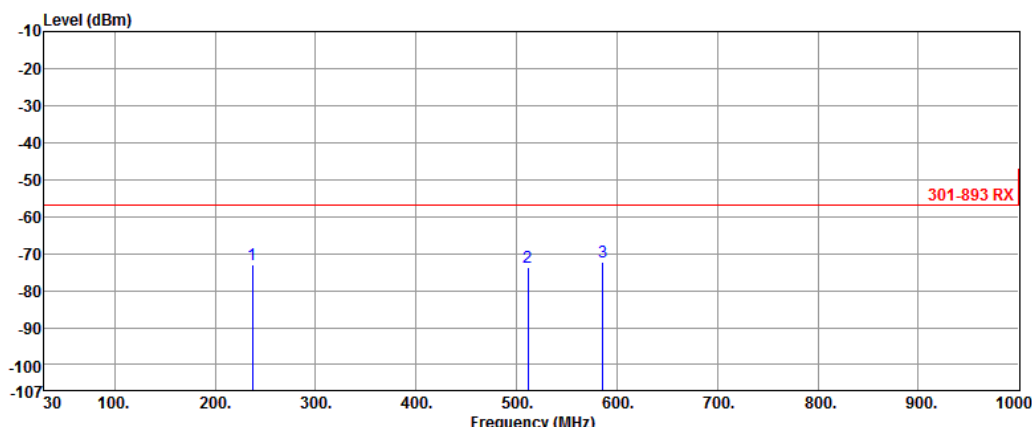


	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.94	-72.99	-57.00	-15.99	-2.79	-70.20
2	511.32	-73.73	-57.00	-16.73	3.05	-76.78
3	586.18	-72.36	-57.00	-15.36	5.33	-77.69

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

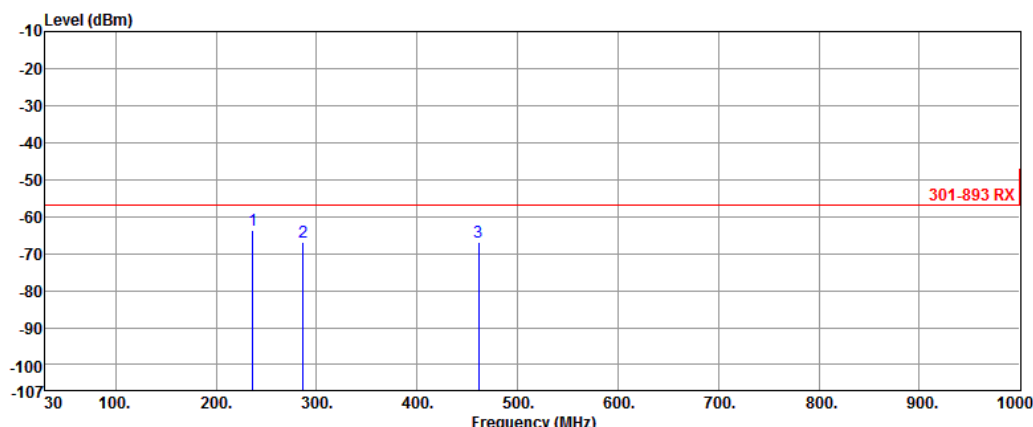


Freq.	Measured value	Limit	Margin	Factor	Reading	
MHz	dBm	dBm	dB	dB	dBm	
1	236.54	-63.65	-57.00	-6.65	-1.92	-61.73
2	286.30	-66.79	-57.00	-9.79	0.38	-67.17
3	461.40	-66.90	-57.00	-9.90	2.48	-69.38

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

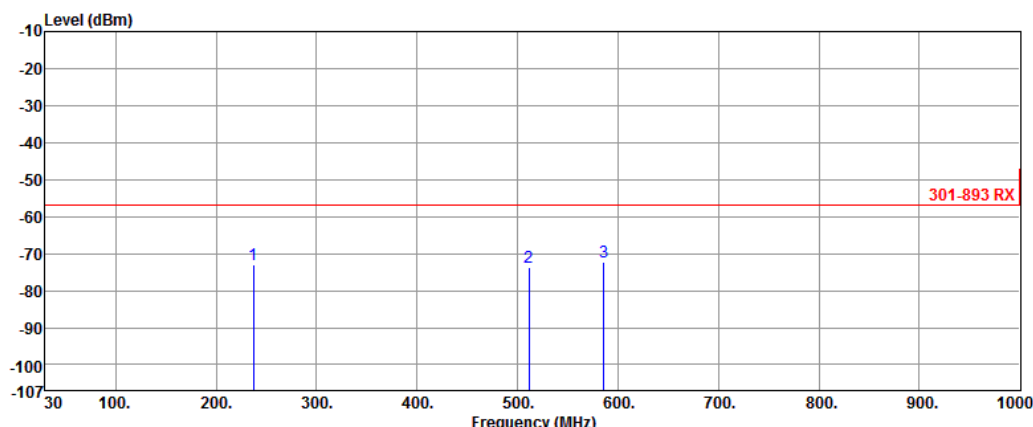

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.84	-72.87	-57.00	-15.87	-2.79	-70.08
2	511.56	-73.65	-57.00	-16.65	3.05	-76.70
3	586.11	-72.45	-57.00	-15.45	5.33	-77.78

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)


Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		

Level (dBm)

<

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

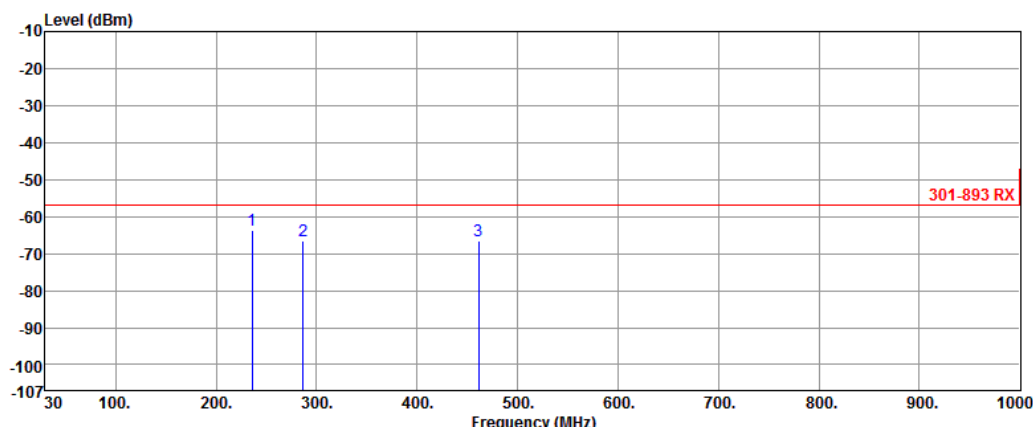

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	236.05	-63.76	-57.00	-6.76	-1.95	-61.81
2	286.56	-66.54	-57.00	-9.54	0.38	-66.92
3	461.57	-66.54	-57.00	-9.54	2.49	-69.03

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)


Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Vertical		

Level (dBm)

</

4.1.5 Radiated Results of Receiver Spurious Emissions (Above 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

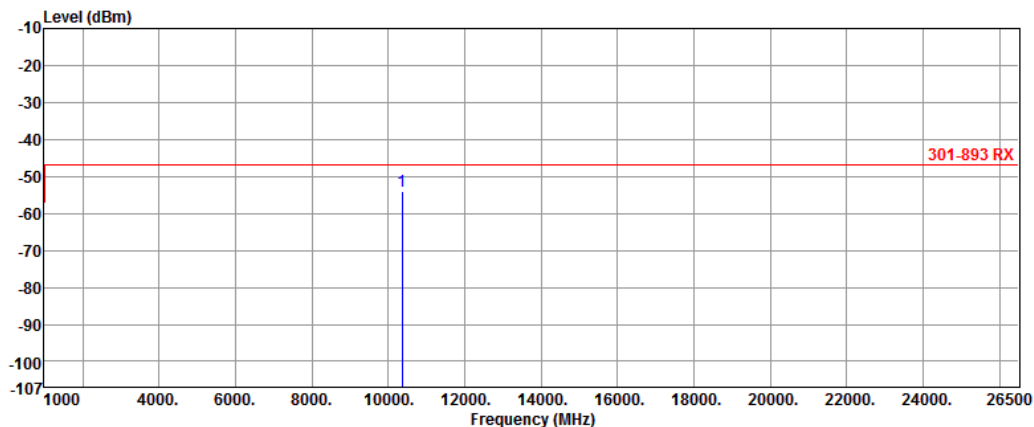

Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 10360.07	-54.05	-47.00	-7.05	17.67	-71.72

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)

Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

Level (dBm)

</

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		
</			

Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		
</			

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

Level (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
Polarization	Vertical		
</			

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

Level (dBm)

Modulation	HT20	Test Freq. (MHz)	5700
Polarization	Vertical		
<			

4.1.6 Conducted Results of Receiver Spurious Emissions (Below 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
Level (dBm)			

Modulation	11a	Test Freq. (MHz)	5700


Modulation	HT20	Test Freq. (MHz)	5180

Modulation	HT20	Test Freq. (MHz)	5700

4.1.7 Conducted Results of Receiver Spurious Emissions (Above 1GHz)

Modulation	11a	Test Freq. (MHz)	5180
<			

Modulation	11a	Test Freq. (MHz)	5700
------------	-----	------------------	------

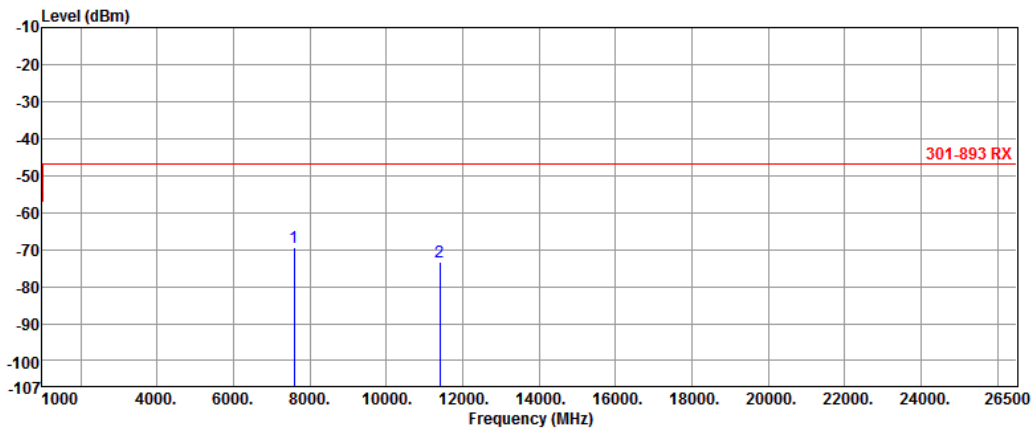


Freq.	Measured value	Limit	Margin	Factor	Reading
MHz	dBm	dBm	dB	dB	dBm
1 7579.00	-69.58	-47.00	-22.58	0.00	-69.58
2 11400.00	-73.47	-47.00	-26.47	0.00	-73.47

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

Modulation	HT20	Test Freq. (MHz)	5180
</			

Modulation	HT20	Test Freq. (MHz)	5700
------------	------	------------------	------

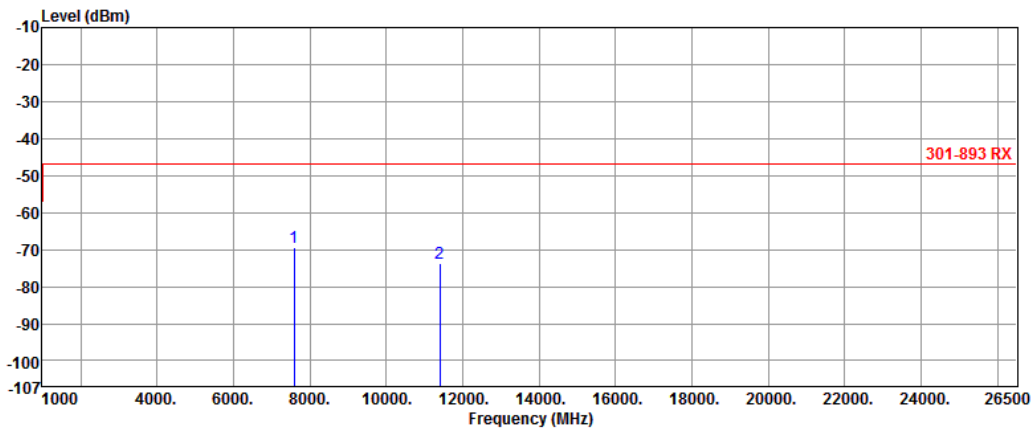

	Freq.	Measured value	Limit	Margin	Factor	Reading
	MHz	dBm	dBm	dB	dB	dBm
1	7579.00	-69.54	-47.00	-22.54	0.00	-69.54
2	11400.00	-73.75	-47.00	-26.75	0.00	-73.75

Note 1: Measured Value (dBm) = Reading (dBm) + Factor (dB)
 Note 2: Margin (dB) = Measured Value (dBm) – Limit (dBm)

5 Adaptivity Test Results

5.1 Adaptivity


5.1.1 Adaptivity Limit

Adaptivity Limit	
☐	LBT based Detect and Avoid (Frame Based Equipment): - Clear Channel Assessment (CCA) time shall be not less than 20 us; - Channel Occupancy Time (COT) shall be in the range 1 ms ~ 10 ms - Minimum Idle Period shall be at least 5 % of Channel Occupancy Time
☒	Load based Equipment may implement an LBT based spectrum sharing mechanism based on the Clear Channel Assessment (CCA) mode using "energy detect", as described in IEEE 802.11™-2012 [8], clause 9, clause 10, clause 18 and clause 20 or as described in IEEE 802.11ac™-2013 [9], clause 8, clause 9, clause 10 and clause 22
☐	LBT based Detect and Avoid (Load Based Equipment): ☐ Option A - Clear Channel Assessment (CCA) time shall be not less than 20 us - Extended CCA(q * observed slots) observed slot: 18us (ECCA time slot) or Busy slot $q=16\sim1024 / N=1\sim q$ - Channel Occupancy Time (COT) shall be less than 10 ms - Idle Period is equal to CCA or ECCA ☐ Option B - Clear Channel Assessment (CCA) time shall be not less than 20 us - Extended CCA: $N*CCA$ $N:1\sim q$ randomly / $q=4\sim32$ (q is selected by the manufacturer) - Channel Occupancy Time (COT) ($13/32*q$) ms - Idle Period is equal to $CCA\sim CCA*N$
☒	Short Control Signalling Transmissions: Short Control Signalling Transmissions shall have a maximum duty cycle of 5 % within an observation period of 50 ms.

5.1.2 Test Procedures

Reference to clause 5.3.9.2 of ETSI EN 301 893 V1.8.1 (2015-03).

5.1.3 Test Setup

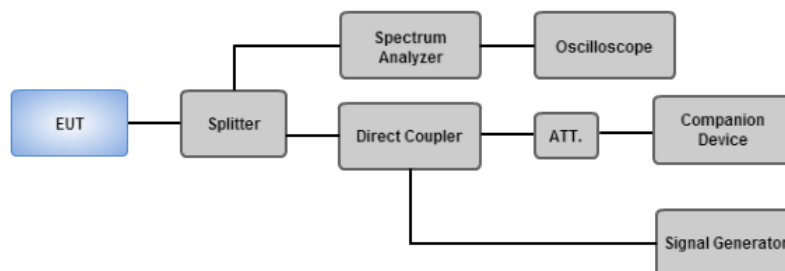


5.1.4 Test Result of Adaptivity and Short Control Signalling Transmissions


Adaptivity Result					
EUT firmware / software version		3.4.0.92			
Adaptivity Detection Threshold Level (dBm)		-67.76			
Modulation Mode	Freq. (MHz)	Short Control Signalling Transmissions (ms)	Channel Occupancy Time (ms)	Idle Period Time (us)	Adaptivity
802.11an (HT20)	5180	1.152	0.992	40	Pass
802.11an (HT20)	5500	0.978	0.463	40	Pass
Limit		< 2.5 ms	-	> 20us	N/A

Adaptivity Result Plots

802.11an (HT20) - 5180MHz

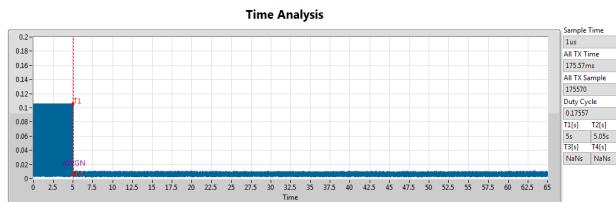


802.11an (HT20) - 5500MHz

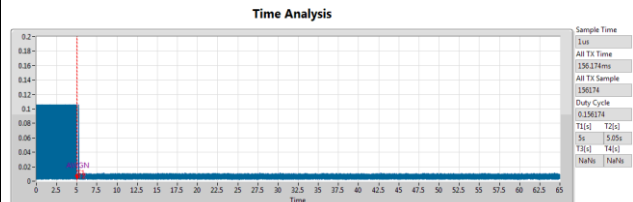


5.1.5 Short Control Signalling Transmissions Plots


Short Control Signalling Transmissions Plots

802.11an (HT20) - 5180MHz

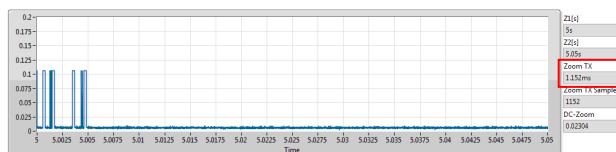

802.11an (HT20) - 5500MHz

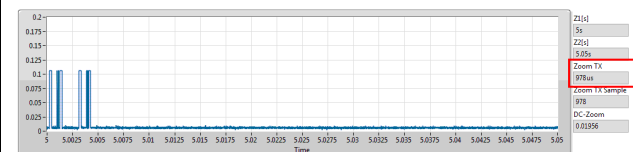

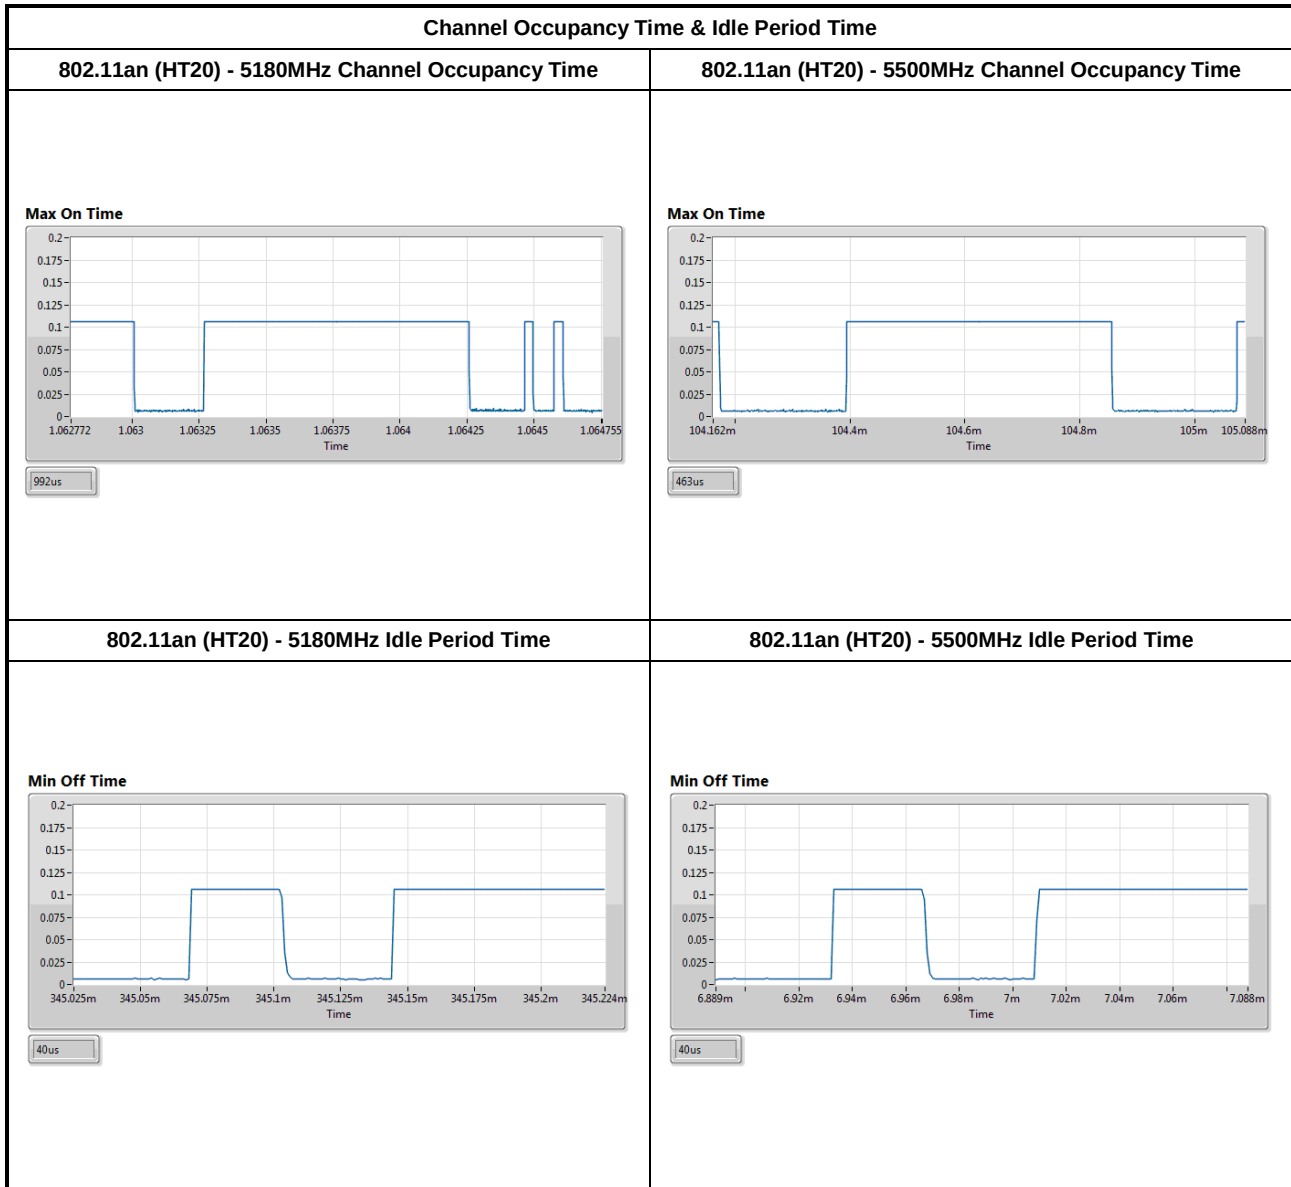

Note: Zoom TX is short control signalling transmission time.

6 Photographs of the Test Configuration


Spurious Emission Radiated Test



Spurious Emission Conducted Test



Adaptivity, Receiver Blocking and Short Control Signalling Transmissions Test

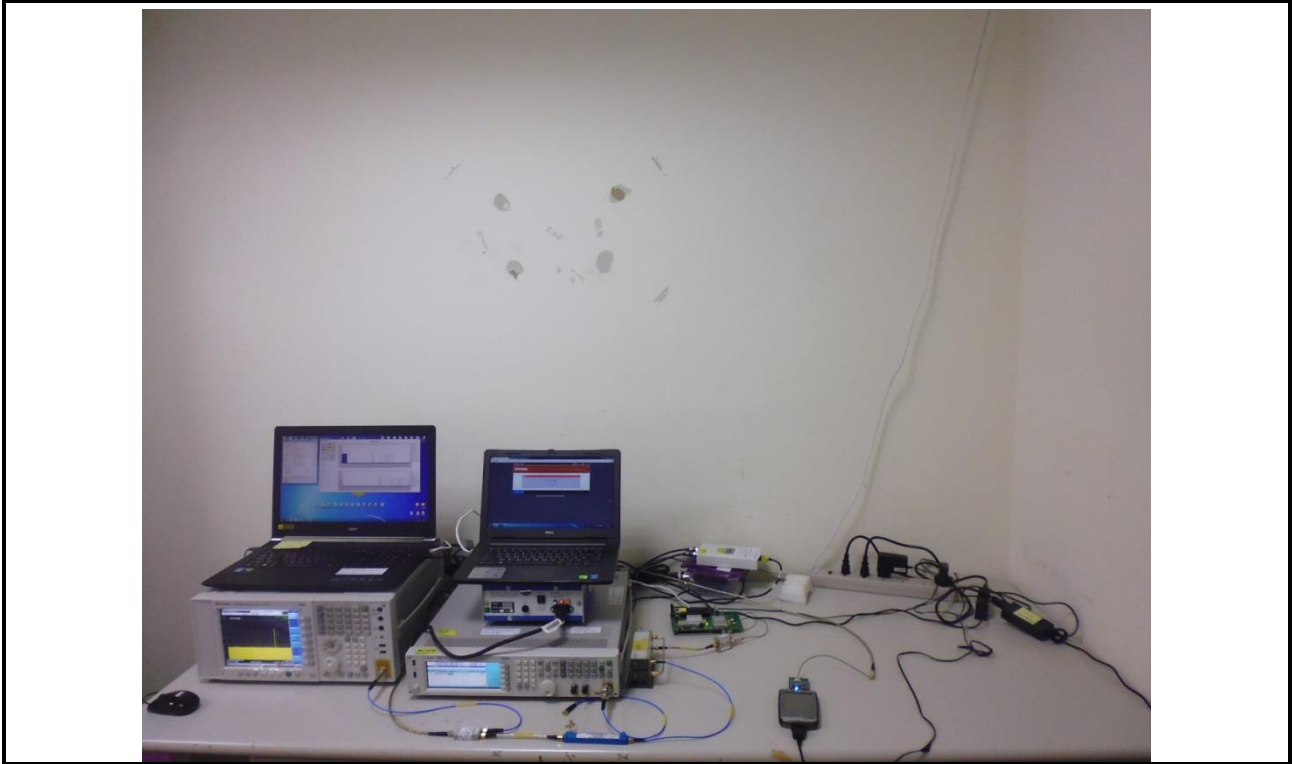

7 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp, it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan Hsiang. Location map can be found on our website <http://www.icertifi.com.tw>.

Linkou

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin Kou
District, New Taipei City, Taiwan,
R.O.C.

Kwei Shan

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd
St., Kwei Shan Hsiang, Tao Yuan
Hsien 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC_Service@icertifi.com.tw

==END==